


**CONTEC-Kombi-securing clamp
for SML-Pipe Systems as per DIN 19522 / EN 877**

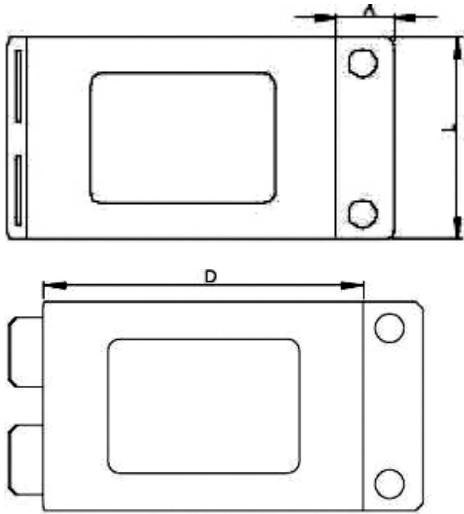

Kombi-grip collar

DN	A(mm)	D(mm)	L(mm)	Piece packaging unit	Item no.:
50	24	81	72	10	405050
70	24	102	72	10	405070
80	24	102	72	10	405080
100	25	136	87	10	405100
125	25	162	98	10	405125
150	25	182	98	5	405150

Security collar with axial restraint for all Con-Power (Rapid) and CV/CE couplings

Material metal collar:	galvanised steel
Material locking parts:	galvanised steel
Axial restraint:	DN 50 - 100: up to 10 bar; DN 125 - 150: up to 5 bar
Screw size:	DN 50 - 80: round head screws with hexagon socket with washers M 8 x 50 DN 100 - 150: round head screws with hexagon socket with washers M 10 x 45
Torque:	DN 50 = 12 Nm; DN 70 = 12 Nm; DN 80 = 12 Nm; DN 100 = 32 Nm; DN 125 = 32 Nm; DN 150 = 45 Nm;